



ALIGHT

COB LED & LED LIGHTING

Hot Sale LED Track Lights

HIGH-END TRACK LIGHT



Track Light

AL-TL0115

AL-TL0118

AL-TL0125

AL-TL0128

AL-TL0135


AL-TL0140




- Six wattages for your choice.
- The die-casting aluminum lamp body, with every parts well-designed and looking fashionable. All parts have been strictly according to EU regulation.
- No RF interference, no buzzing noise, no UV radiation.

PRODUCT PARAMETERS


LUMINOUS INTENSITY DISTRIBUTION




LUMINOUS INTENSITY DISTRIBUTION




LUMINOUS INTENSITY DISTRIBUTION




LUMINOUS INTENSITY DISTRIBUTION



LUMINOUS INTENSITY DISTRIBUTION



LUMINOUS INTENSITY DISTRIBUTION



Model	Power	Size (mm)	LED	CRI (Ra)	CCT	Luminous Flux	Beam Angle	Dimensions
AL-TL0115	15W	Φ73*180	Cree CXA1512	≥80	2700K-5000K	1200lm	18° 28° 42°	
AL-TL0118	18W	Φ73*180	Cree CXA1816	≥80	2700K-5000K	1500lm	18° 28° 42°	
AL-TL0125	25W	Φ83*188	Cree CXA1816	≥80	2700K-5000K	2300lm	18° 28° 42°	
AL-TL0128	28W	Φ83*188	Cree CXA1820	≥80	2700K-5000K	2700lm	18° 28° 42°	
AL-TL0135	35W	Φ98*210	Cree CXA1830	≥80	2700K-5000K	3400lm	18° 28° 42°	
AL-TL0140	40W	Φ98*210	LUMILEDS PH1208	≥80	2700K-5000K	3900lm	18° 28° 42°	

DALI DIMMING

DALI Controlled Solutions



Track Light




IP20 A++



Technical Description

DALI Diagram:

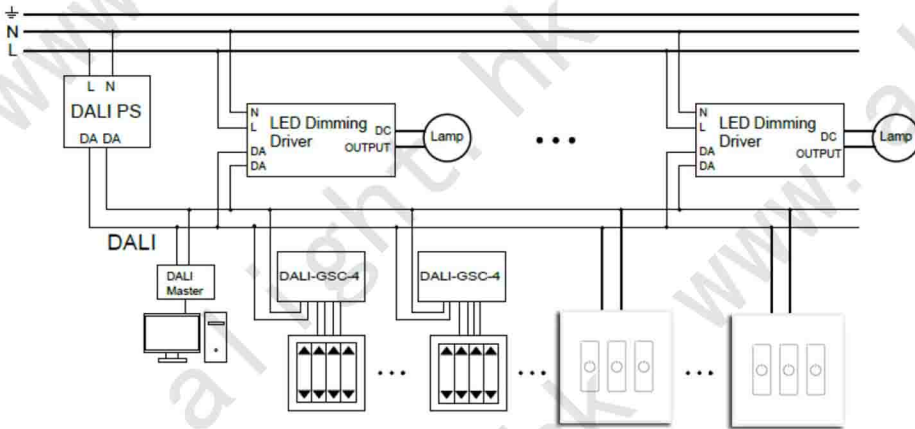

What is DALI?

- **DALI** stands for Digital Addressable Lighting Interface. In other words, it is a worldwide standardized digital lighting interface.
- **DALI** is a two-way communication system that brings digital technology to lighting. Every aspect of lighting can be incorporated into a DALI control solution.
- **DALI** can control a single light fitting or a defined group of light fittings within a network.
- **DALI** allows for light fittings and user interfaces to use the same data network effectively reducing cabling by half.


DALI Dimming Track Light:

Adjustable spotlight with adapter for installation on mains voltage track for high-performance LED with monochromatic Neutral White (4,000K) emission.

DALI driver built-into product.

The fitting is made of die-cast aluminum and thermoplastic material.



PRODUCT PARAMETERS

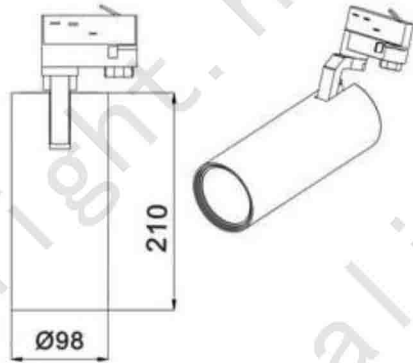


Wiring info : DALI components contained within the fitting.

- Model : AL-TL0130-D
- Total power : 30W
- Size : Ø98x210mm
- Color : White & Black
- Weight : 1.37kg
- Total lighting output : 2900lm
- Color temperature : 3000-5000K
- CRI : 80Ra
- Luminous efficacy (real value): 90lm/W
- Voltage : AC200-240V / 0.3A
- Life Time: 50.000hrs L80 B10 (Ta 40° C)
- PF : > 0.95
- Beam angle [°] : 18 / 28 / 42
- Base Type : 4 wire


SINGLE CIRCUIT *DALI* TRACK SYSTEM

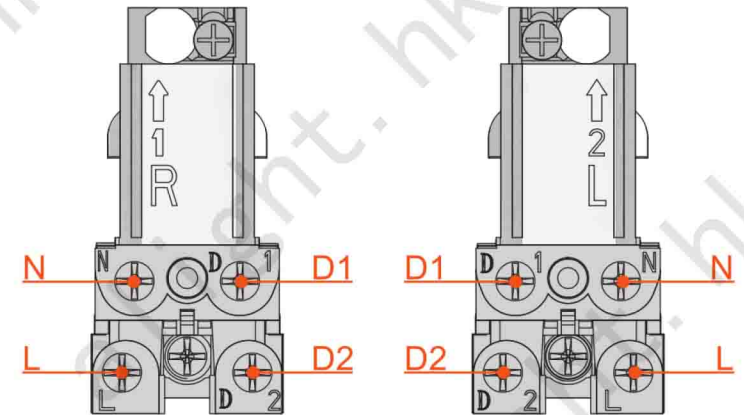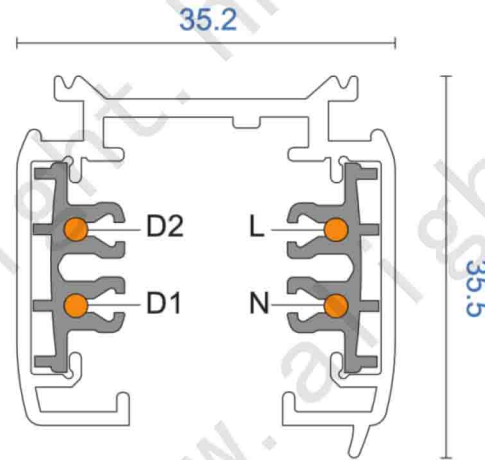



Track Length:

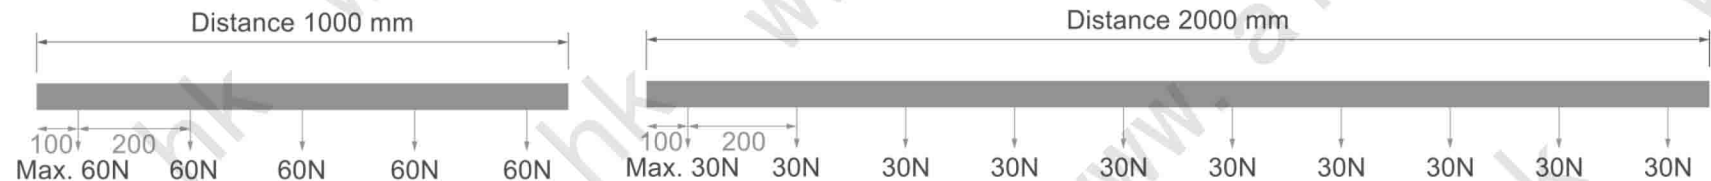



L / mm	a / mm	b / mm	c / mm	d / mm
1000	125			
2000	125	998		
3000	125		914	1167
4000	125		1247	1501

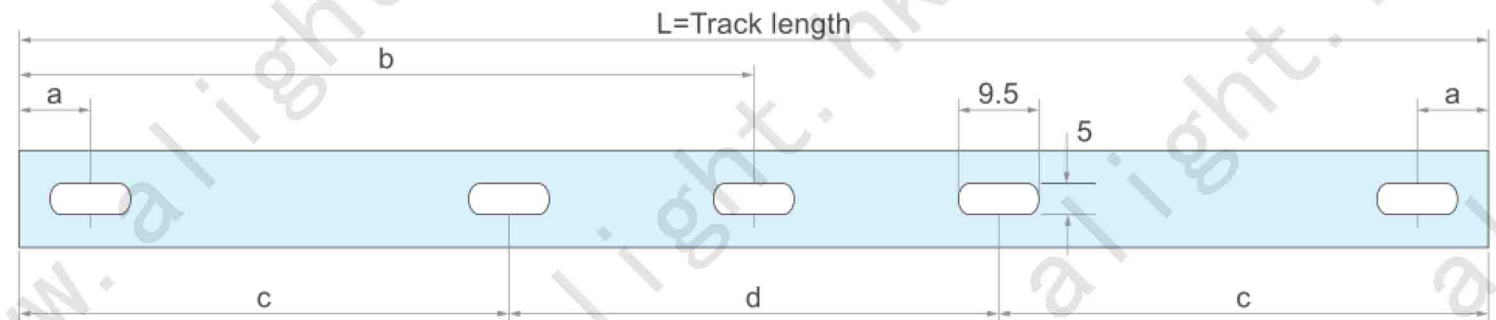

3 CIRCUIT DALI TRACK SYSTEM

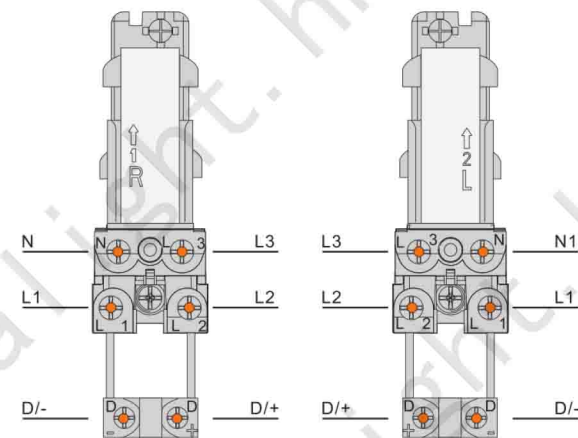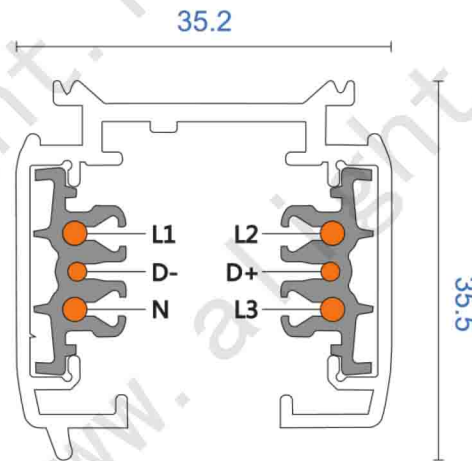



Track Length:

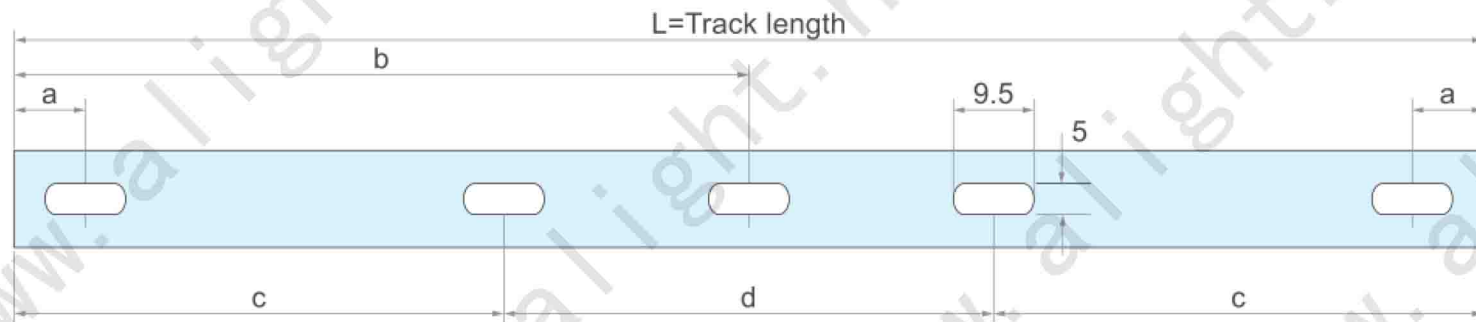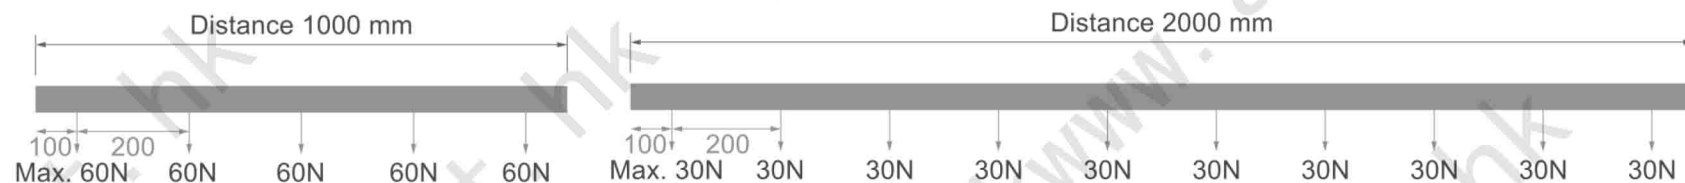




L / mm	a / mm	b / mm	c / mm	d / mm
1000	125			
2000	125	998		
3000	125		914	1167
4000	125		1247	1501

MOUNTING INSTRUCTION


Adaptor Installation Instruction

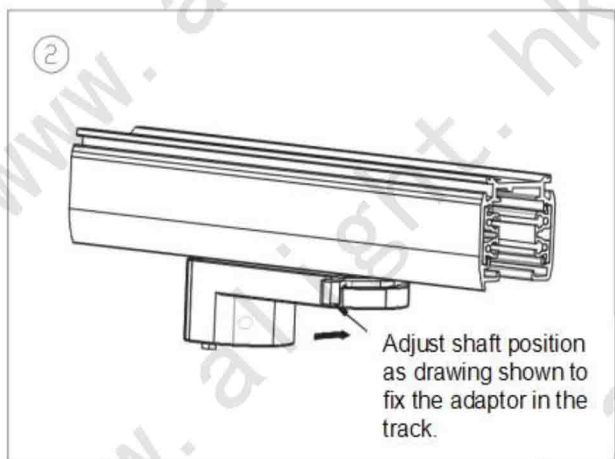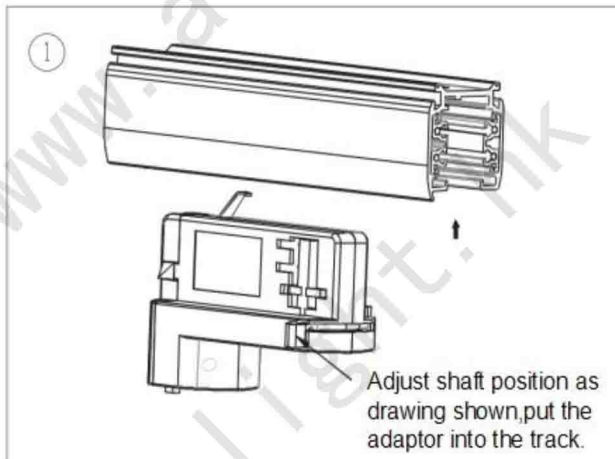



Adaptor Disassembly Instruction

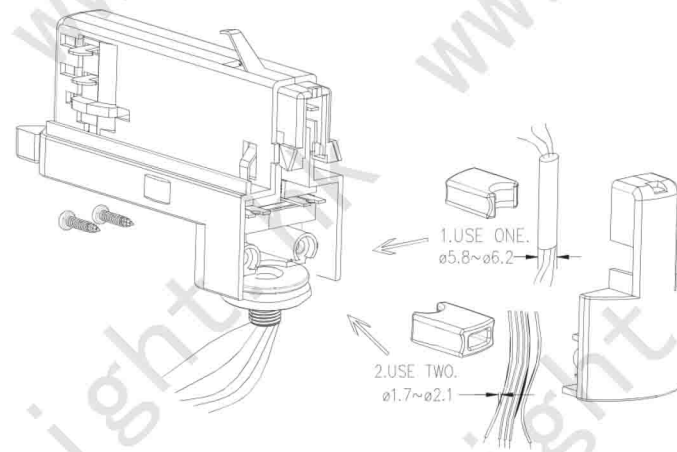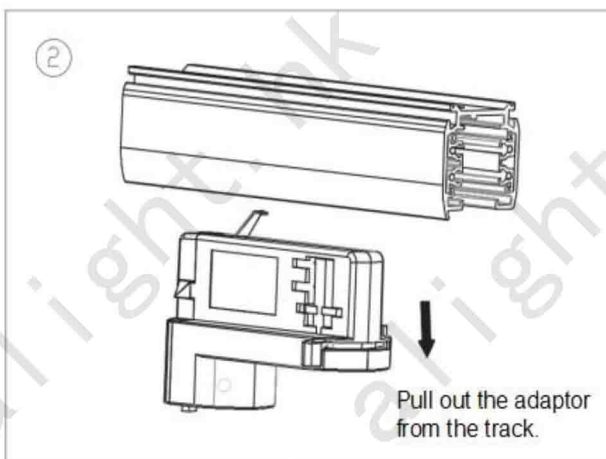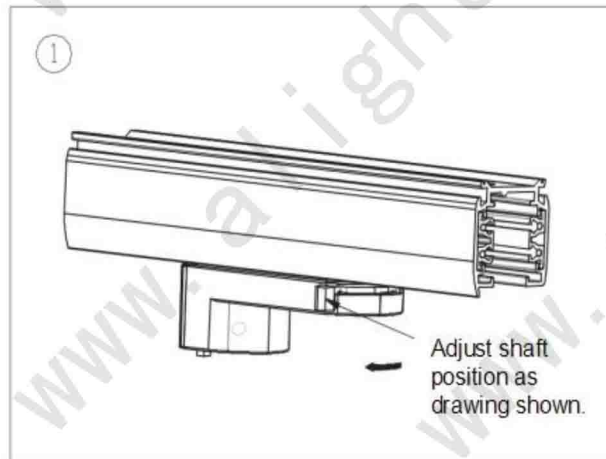

1. Earth wire, Live wire and Null wire: 0.75², 18A WG (Press the wire into wire slot by tool)
2. D1, D2 Wire: 16-26A WG, 7-8mm of the wire end is bare and tinned or Shark Teeth.
3. Maximum torque of screw: 5Kgf.cm
4. Rotation range of connector between light and adaptor 0-350°
5. Electrical parameter: 12V-250V(AC,DC), 10A.



Single Circuit DALI Track

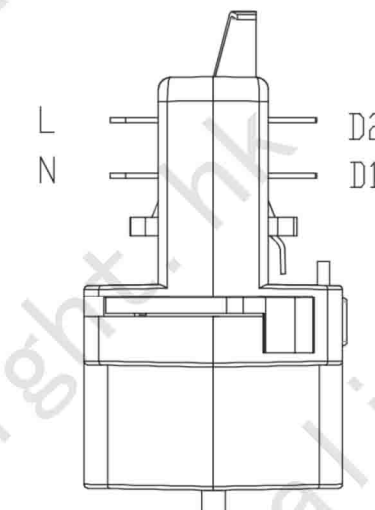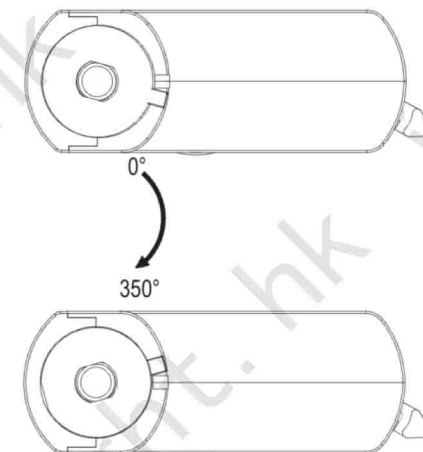

TRIAC SOFT DIM

Warm Glow LED Dimming



Track Light

AL-TL0115/20/30




IP20




- 2.4G wireless remote controller systems
- Can use the triac dimmer to dim the Color temperature & Intensity, you only need to install our cct adjustable lamp, no need to change anything else.

TRIAC Diagram:

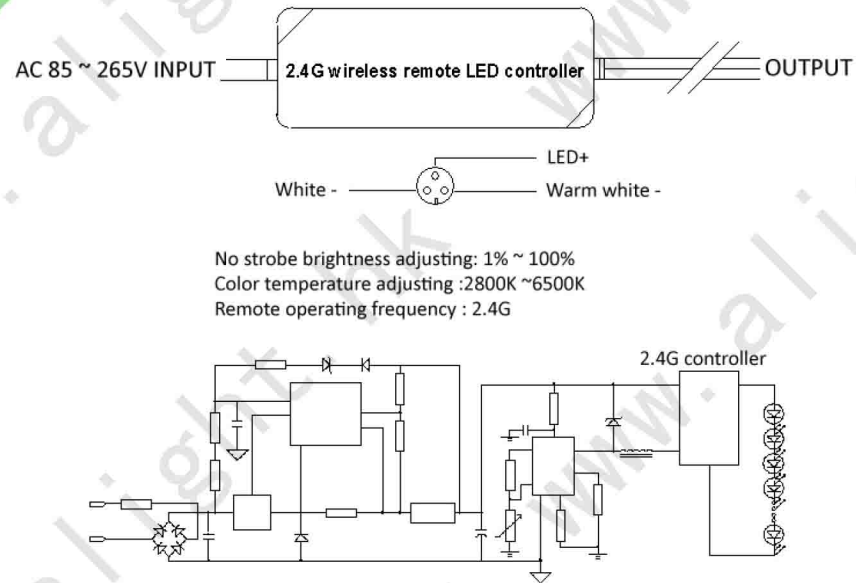

Triac with the 2.4G remote controller (wireless triac dimming):

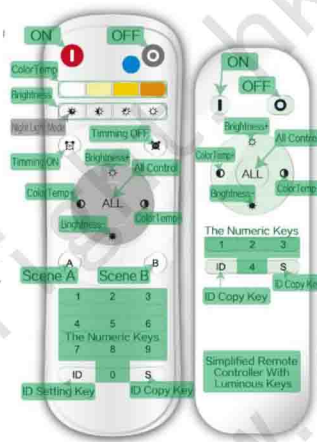

Technical Description


LED Dimming offers both perfection & peace of mind.

- **Soft Dim Technology** offers both conventional phase dimming and DALI controlled solutions.
- **Soft Dim** allows you to create the perfect balance between visual comfort and ambience.
- **Soft Dim Technology** not only reduces both the luminous intensity and colour temperature of the light source when dimmed , but also so following the curve of a halogen closely. The result is gradual and smooth transformation between 2800K and 6500K over the dimming range of 1% - 100%.

➤ **Remarks:** Dual color COB LEDs , they only can reach around 80lm/W for whole lamp. If you don't need color temperature adjustable, only need normal dimmable(e.g 2700K,3000K,4000K,5000K), we can reach 100lm/W.

PRODUCT PARAMETERS

TRIAC Soft Dim

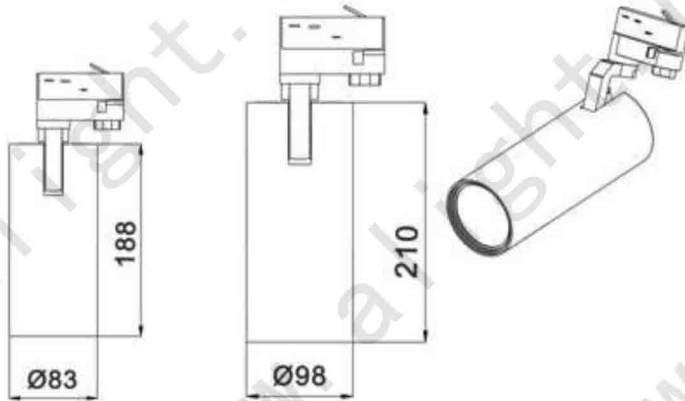

LED: Dual colour COB chip

- Model : AL-TL0115/20/30
- Total power : 15W/20W/30W
- Size : Ø83x188mm / Ø98x210mm
- Color : White & Black
- Weight : 1.37kg
- Total lighting output : 1200 /1800 /2900lm
- Color temperature : 3000-6000K
- CRI : 80Ra
- Luminous efficacy (real value): 90lm/W
- Voltage : AC200-240V / 0.3A
- Life Time: 50.000hrs L80 B10 (Ta 40° C)
- PF : > 0.95
- Beam angle [°]: 18 / 28 / 42
- Base Type : 2 pin, 3 pin and 4 pin available

TRIAC DIMMING with CABLE

Built-in Dimmable Driver



Track Light

AL-TL0120 /30




IP20



TRIAC Diagram:

TRIAC Dimming

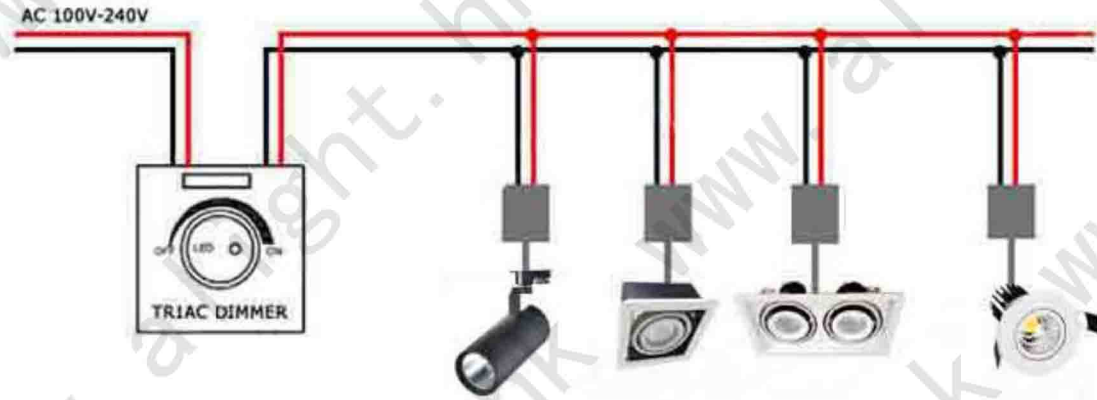

LED Dimmer:



Technical Description

- The triac dimming circuit, a diode alternating current switch (diac) and an LRC circuit generate a pulse that turns on the triac for some portion of the ac cycle. (The diac can conduct current in either direction, but not until breakdown voltage has been exceeded.) A potentiometer adjusts the point at which the diac to send the triac a trigger signal.
- Triacs make up the heart of AC light dimming controls. Triacs used in dimmers have normally been characterized and specified for incandescent lamp loads, which have high current ratings for both steady-state conditions and initial high in-rush currents, as well as very high end-of-life surge current when a filament ruptures.

PRODUCT PARAMETERS



- Model : AL-TL0120
- Total power : 20W / 30W
- Size : Ø83x188mm / Ø98x210mm
- Color : White & Black
- Weight : 1.37kg
- Total lighting output : 1900 / 2900lm
- Color temperature : 3000-6000K
- CRI : 80Ra
- Luminous efficacy (real value): 90lm/W
- Voltage : AC200-240V / 0.3A
- Life Time: 50.000hrs L80 B10 (Ta 40° C)
- PF : > 0.95
- Beam angle [°]: 18 / 28 / 42
- Base Type : 2 pin, 3 pin and 4 pin available

If you are interested in our products, pls feel free to contact us. We look forward to cooperating with you !



< Alight Optoelectronic Industry Commerce Co.,LTD >

TEL : +86 760 22107179

FAX : +86 760 22102131

Website: www.alight.hk/www.alightinc.hk

ADD : 2/F,110# XiaoLan Ave.Central,XiaoLan Town,ZhongShan City,GuangDong,
China 528415



Thank You

Take Alight,Take a Bright Life.