
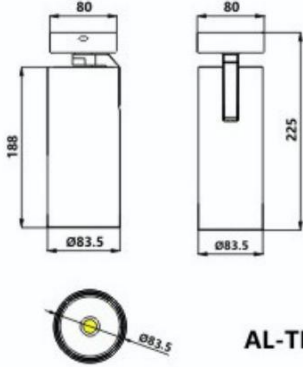





ALIGHT

COB LED Solution Company Since 2008

Type of luminaire		<i>commercial track light</i>																																	
Set model No.		AL-TL0128-42																																	
Image photo	Dimension and materials																																		
	 <p style="text-align: right;">AL-TL0128</p>																																		
Type of light source	<i>CREE 1820</i>	Lamp diameter 83.5mm																																	
Dimming	—	Weight 1.4KG																																	
Dimming range		Body Aluminium																																	
Power input	<i>28W</i>	Reflector Aluminium																																	
Power voltage	<i>220V</i>	Photometric chart																																	
Input frequency	<i>50/60Hz</i>	<p style="text-align: center;">Illumination Cone Curve</p> <table border="1"> <thead> <tr> <th>H[m]</th> <th>Diameter[m]</th> <th>Illuminance[lx]</th> </tr> </thead> <tbody> <tr><td>0.8</td><td></td><td>8315.27</td></tr> <tr><td></td><td></td><td>8247.84</td></tr> <tr><td>1.6</td><td></td><td>2078.82</td></tr> <tr><td></td><td></td><td>2061.96</td></tr> <tr><td>2.4</td><td></td><td>923.92</td></tr> <tr><td></td><td></td><td>916.43</td></tr> <tr><td>3.2</td><td></td><td>519.70</td></tr> <tr><td></td><td></td><td>515.49</td></tr> <tr><td>4.0</td><td></td><td>332.61</td></tr> <tr><td></td><td></td><td>329.91</td></tr> </tbody> </table> <p style="text-align: center;"> C0-C180 C90-C270 </p> <p style="text-align: center;">Distribution Curve of Meridian</p>  <p style="text-align: right;">Unit: cd</p> <p style="text-align: right;"> — c0/180 — c30/210 — c60/240 — c90/270 </p>	H[m]	Diameter[m]	Illuminance[lx]	0.8		8315.27			8247.84	1.6		2078.82			2061.96	2.4		923.92			916.43	3.2		519.70			515.49	4.0		332.61			329.91
H[m]	Diameter[m]		Illuminance[lx]																																
0.8			8315.27																																
			8247.84																																
1.6			2078.82																																
			2061.96																																
2.4			923.92																																
			916.43																																
3.2			519.70																																
			515.49																																
4.0		332.61																																	
		329.91																																	
Driver	<i>Integrated</i>																																		
IP rating	<i>IP20</i>																																		
Beam angle	<i>42°</i>																																		
System lumen out put	<i>2560 lm</i>																																		
System efficacy	<i>90 lm/W</i>																																		
CCT	<i>4000K</i>																																		
CRI	<i>80</i>																																		
Life time	<i>50000</i>																																		
Brand	<i>ALIGHT</i>																																		
Country of origin	<i>China</i>																																		

Remarks